





YAKIMA Locking BedHead

US

LIMITED WARRANTY

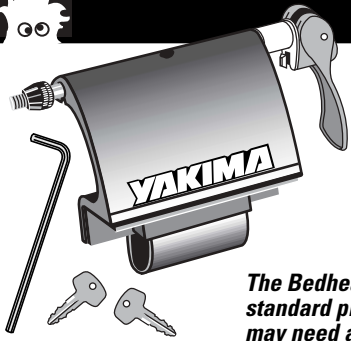


The BedHead is designed to attach to standard pickup bed rails. Bed liners may need alteration.



1 Remove Skewer

Unscrew and remove adjustment nut. Slide skewer out.




2 Loosen Bolt

Use enclosed wrench and loosen enough to separate pieces.




3 Position Rail Clip

Hook rail clip under bed rail. **Position rail clip only where underside of rail is flat.** Loosen bolt more if necessary, and rotate into upright position.

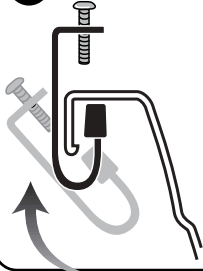

4 Position Fork Block


Slide fork block into position with rail clip as shown.

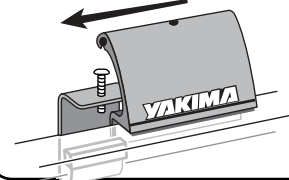

! IF BEDHEAD IS NOT FLAT ON RAIL OR WILL NOT FIT:


Check that rail clip is positioned where the **underside of rail is flat** or remove rail clip and rotate the black, rectangular pad.

Reassemble and **TIGHTEN.**




5 Tighten

Be sure that bolt aligns with indentation in the fork block. Do not overtighten. **TEST** by grabbing and shaking. If BedHead slips or loses contact with rail, tighten more.


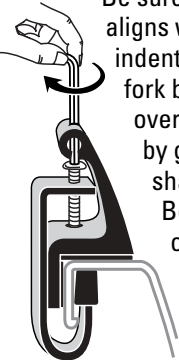


6 Replace skewer and attach the nut.

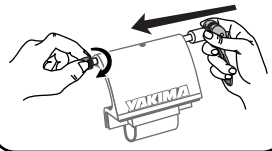

8 Secure Bike

Loosen or tighten the adjustment nut as needed so that lever closes with some resistance.

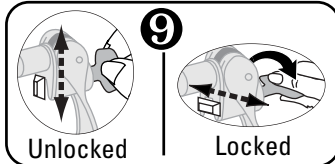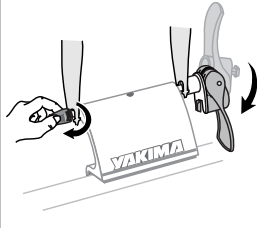

! BEFORE DRIVING AWAY!

Test installation by grabbing and shaking.

TIGHTEN IF LOOSE!

Periodically check that bolt is tight.

Secure rear wheel to prevent shifting!

1032372 Rev.B

Yakima Products ("Yakima") will repair or replace merchandise which proves defective in materials and/or workmanship. The limited warranty is effective for one year from the date of purchase. The limited warranty is applicable only if the Fit List and instructions are followed and the products are used properly. If a customer believes that a Yakima product is defective, the customer must return it to an authorized Yakima dealer with proof of purchase. Yakima will then issue authorization to the dealer for the return of these products. If an article is found to be defective upon inspection by Yakima, Yakima will repair or replace the defective article at its discretion without charge. The customer will pay freight to Yakima, and Yakima will pay any applicable return freight. Unauthorized returns will not be accepted. Normal wear and tear of Yakima products or damage resulting from misuse, accidents, or alterations are not covered by this Limited Warranty. The purchaser acknowledges that Yakima has no control over the attachment of its products to vehicles or the attachment of items to the Yakima products. Accordingly, Yakima cannot assume responsibility for any damage to any property arising out of the improper attachment or use of its products. In addition, this Limited Warranty applies only to Yakima products and not to other products used in conjunction with Yakima products. This Limited Warranty is in lieu of all other warranties, expressed or implied, and does not cover consequential damages of any kind that may arise from the use or misuse of any Yakima product.




YAKIMA Locking BedHead

US

LIMITED WARRANTY




The BedHead is designed to attach to standard pickup bed rails. Bed liners may need alteration.



1 Remove Skewer

Unscrew and remove adjustment nut. Slide skewer out.




2 Loosen Bolt

Use enclosed wrench and loosen enough to separate pieces.




3 Position Rail Clip

Hook rail clip under bed rail. **Position rail clip only where underside of rail is flat.** Loosen bolt more if necessary, and rotate into upright position.



4 Position Fork Block


Slide fork block into position with rail clip as shown.



! IF BEDHEAD IS NOT FLAT ON RAIL OR WILL NOT FIT:


Check that rail clip is positioned where the **underside of rail is flat** or remove rail clip and rotate the black, rectangular pad.

Reassemble and **TIGHTEN.**




5 Tighten

Be sure that bolt aligns with indentation in the fork block. Do not overtighten. **TEST** by grabbing and shaking. If BedHead slips or loses contact with rail, tighten more.


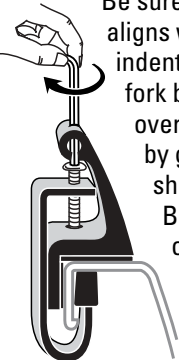


6 Replace skewer and attach the nut.



8 Secure Bike

Loosen or tighten the adjustment nut as needed so that lever closes with some resistance.



! BEFORE DRIVING AWAY!

Test installation by grabbing and shaking.

TIGHTEN IF LOOSE!

Periodically check that bolt is tight.

Secure rear wheel to prevent shifting!

1032372 Rev.B

Yakima Products ("Yakima") will repair or replace merchandise which proves defective in materials and/or workmanship. The limited warranty is effective for one year from the date of purchase. The limited warranty is applicable only if the Fit List and instructions are followed and the products are used properly. If a customer believes that a Yakima product is defective, the customer must return it to an authorized Yakima dealer with proof of purchase. Yakima will then issue authorization to the dealer for the return of these products. If an article is found to be defective upon inspection by Yakima, Yakima will repair or replace the defective article at its discretion without charge. The customer will pay freight to Yakima, and Yakima will pay any applicable return freight. Unauthorized returns will not be accepted. Normal wear and tear of Yakima products or damage resulting from misuse, accidents, or alterations are not covered by this Limited Warranty. The purchaser acknowledges that Yakima has no control over the attachment of its products to vehicles or the attachment of items to the Yakima products. Accordingly, Yakima cannot assume responsibility for any damage to any property arising out of the improper attachment or use of its products. In addition, this Limited Warranty applies only to Yakima products and not to other products used in conjunction with Yakima products. This Limited Warranty is in lieu of all other warranties, expressed or implied, and does not cover consequential damages of any kind that may arise from the use or misuse of any Yakima product.




YAKIMA Locking BedHead FR


LIMITED WARRANTY



Le porte-vélo Locking BedHead est conçu pour s'accrocher à la bordure de la caisse d'une camionnette normale. S'il y a une doublure de caisse, il faudra peut-être la modifier.




1 Enlever l'axe à serrage rapide
Dévisser et enlever l'écrou de réglage. Sortir l'axe.

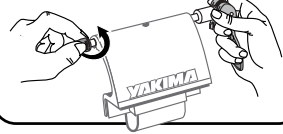


2 Desserrer le boulon
À l'aide de la clé fournie, desserrer le boulon suffisamment pour séparer les pièces.



3 Positionner le crochet
Engager le crochet sous la bordure de la caisse. **Ne placer le crochet qu'à un endroit où le dessous de la bordure est plat.** Au besoin, desserrer le boulon encore plus et faire pivoter le crochet pour l'amener à la verticale.

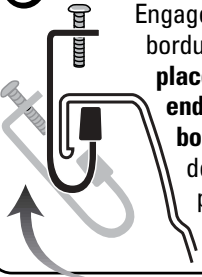


4 Placer le bloc de fourche
Enfiler le bloc de fourche sur le crochet tel qu'illustré.

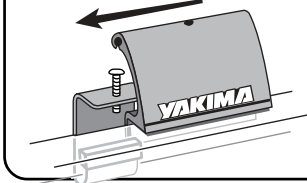

! SI LE BLOC DE FOURCHE NE PORTE PAS À PLAT OU NE S'ENGAGE PAS:

Vérifier que le crochet est positionné à un endroit où le dessous de la bordure est plat ou enlever le crochet et retourner la garniture rectangulaire noire.


Remonter et SERRER.





5 Serrer
Vérifier que le boulon est aligné avec le creux du bloc de fourche. Ne pas trop serrer. VÉRIFIER la solidité du montage en essayant de faire bouger le bloc avec la main: si le porte-vélo glisse ou se décroche, serrer plus fort.



6 Remettre l'axe à serrage rapide en place et visser l'écrou.

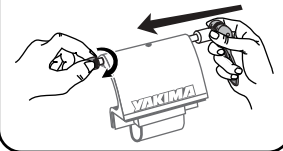

8 Fixer le vélo
Serrer ou desserrer l'écrou de réglage de manière que le levier se ferme avec une bonne résistance.

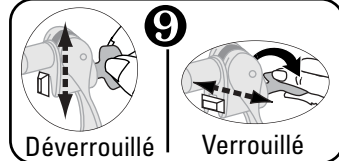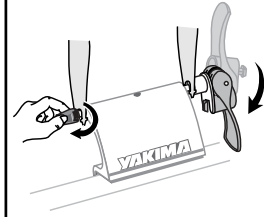

! AVANT DE PRENDRE LA ROUTE!

Vérifier la solidité du montage en essayant de faire bouger les pièces avec la main. **SERRER S'IL Y A DU JEU!** Vérifier régulièrement le serrage du boulon. Attacher l'arrière du vélo pour qu'il ne se déplace pas.

1032372 Rev.B

Yakima Products ("Yakima") will repair or replace merchandise which proves defective in materials and/or workmanship. The limited warranty is effective for one year from the date of purchase. The limited warranty is applicable only if the Fit List and instructions are followed and the products are used properly. If a customer believes that a Yakima product is defective, the customer must return it to an authorized Yakima dealer with proof of purchase. Yakima will then issue authorization to the dealer for the return of these products. If an article is found to be defective upon inspection by Yakima, Yakima will repair or replace the defective article at its discretion without charge. The customer will pay freight to Yakima, and Yakima will pay any applicable return freight. Unauthorized returns will not be accepted. Normal wear and tear of Yakima products or damage resulting from misuse, accidents, or alterations are not covered by this Limited Warranty. The purchaser acknowledges that Yakima has no control over the attachment of its products to vehicles or the attachment of items to the Yakima products. Accordingly, Yakima cannot assume responsibility for any damage to any property arising out of the improper attachment or use of its products. In addition, this Limited Warranty applies only to Yakima products and not to other products used in conjunction with Yakima products. This Limited Warranty is in lieu of all other warranties, expressed or implied, and does not cover consequential damages of any kind that may arise from the use or misuse of any Yakima product.




YAKIMA Locking BedHead FR


LIMITED WARRANTY



Le porte-vélo Locking BedHead est conçu pour s'accrocher à la bordure de la caisse d'une camionnette normale. S'il y a une doublure de caisse, il faudra peut-être la modifier.




1 Enlever l'axe à serrage rapide
Dévisser et enlever l'écrou de réglage. Sortir l'axe.




2 Desserrer le boulon
À l'aide de la clé fournie, desserrer le boulon suffisamment pour séparer les pièces.



3 Positionner le crochet
Engager le crochet sous la bordure de la caisse. **Ne placer le crochet qu'à un endroit où le dessous de la bordure est plat.** Au besoin, desserrer le boulon encore plus et faire pivoter le crochet pour l'amener à la verticale.




4 Placer le bloc de fourche
Enfiler le bloc de fourche sur le crochet tel qu'illustré.



! SI LE BLOC DE FOURCHE NE PORTE PAS À PLAT OU NE S'ENGAGE PAS:

Vérifier que le crochet est positionné à un endroit où le dessous de la bordure est plat ou enlever le crochet et retourner la garniture rectangulaire noire.


Remonter et SERRER.





5 Serrer
Vérifier que le boulon est aligné avec le creux du bloc de fourche. Ne pas trop serrer. VÉRIFIER la solidité du montage en essayant de faire bouger le bloc avec la main: si le porte-vélo glisse ou se décroche, serrer plus fort.



6 Remettre l'axe à serrage rapide en place et visser l'écrou.



8 Fixer le vélo
Serrer ou desserrer l'écrou de réglage de manière que le levier se ferme avec une bonne résistance.



! AVANT DE PRENDRE LA ROUTE!

Vérifier la solidité du montage en essayant de faire bouger les pièces avec la main. **SERRER S'IL Y A DU JEU!** Vérifier régulièrement le serrage du boulon. Attacher l'arrière du vélo pour qu'il ne se déplace pas.

1032372 Rev.B

Yakima Products ("Yakima") will repair or replace merchandise which proves defective in materials and/or workmanship. The limited warranty is effective for one year from the date of purchase. The limited warranty is applicable only if the Fit List and instructions are followed and the products are used properly. If a customer believes that a Yakima product is defective, the customer must return it to an authorized Yakima dealer with proof of purchase. Yakima will then issue authorization to the dealer for the return of these products. If an article is found to be defective upon inspection by Yakima, Yakima will repair or replace the defective article at its discretion without charge. The customer will pay freight to Yakima, and Yakima will pay any applicable return freight. Unauthorized returns will not be accepted. Normal wear and tear of Yakima products or damage resulting from misuse, accidents, or alterations are not covered by this Limited Warranty. The purchaser acknowledges that Yakima has no control over the attachment of its products to vehicles or the attachment of items to the Yakima products. Accordingly, Yakima cannot assume responsibility for any damage to any property arising out of the improper attachment or use of its products. In addition, this Limited Warranty applies only to Yakima products and not to other products used in conjunction with Yakima products. This Limited Warranty is in lieu of all other warranties, expressed or implied, and does not cover consequential damages of any kind that may arise from the use or misuse of any Yakima product.